

## E-FIELD PROBES

EA 5091, EB 5091, EC 5091, ED 5091

# Measuring electric fields with shaped frequency response up to 50 GHz

using instruments in the NBM-500 family

- ▲ **Frequency shaping to match the ICNIRP, FCC, IEEE or Safety Code 6 standard for occupational/ controlled environment**
- ▲ **Results are directly displayed in “% of Standard“**
- ▲ **Precise results without the need to know the emitted frequency**
- ▲ **Isotropic (non-directional) measurements**

The probes contain 6 dipoles, three diode based and three thermocouple based dipoles. The correctly tuned overlap of two dipoles, one acting as a high pass filter the other as a low pass filter, provides a frequency sensitivity that mirrors a particular standard. Testing for compliance to that standard is very easy to perform, since you no longer have the need to know the emitted frequency.

## APPLICATIONS

Electric fields from 300 kHz to 50 GHz (3 MHz to 50 GHz with EB 5091) can be detected. The probes are particularly suitable for measuring human safety limit values in mobile phone, telecom transmitter and broadcasting environment.

## CALIBRATION

The probes are calibrated at several frequencies. The correction values are stored in an EPROM in the probe and are automatically taken into account by the NBM instrument. Calibrated accuracy is thus obtained regardless of the combination of probe and instrument.



## DESCRIPTION - Shaped Probes

The goal in designing and manufacturing a traditional, “flat” frequency response probe is to make the probe equally responsive to energy at every frequency within its rated frequency range. In contrast, Narda’s patented shaped frequency response probes are designed and manufactured so that their sensitivity mirrors a particular standard (or guidance) as closely as possible.





For example, many of the major guidances and standards in the world set E-field limits for maximum human exposure at 614 V/m (1000 W/m<sup>2</sup>) at lower frequencies (~1 MHz). At frequencies of 30 to 300 MHz the limits are typically much less, 61.4 V/m (10 W/m<sup>2</sup>), a difference of 20 dB (100 times the power). A shaped frequency response probe designed for such limits is 100 times more sensitive in the 100 MHz region, than at 1 MHz.

If you were performing a survey of a site with a flat frequency response probe that has both of the above frequency ranges and your survey indicated 137 V/m (or 50 W/m<sup>2</sup>), it would be difficult to determine if the site was out of compliance without turning one of the emitters off. Again, given the example above, the site could be generating anywhere from 5% to 500% of the human exposure limit. There are many sites with multiple emissions (rooftops, flight lines, broadcast towers) that have emitters at different exposure limits.

If your interest is general safety measurements, to know if you comply with an exposure limit or not, you will find shaped probes easy to use in any environment. The display of total field strength with shaped probes is not in terms of V/m or W/m<sup>2</sup>, it is “% of Std.” So at a multiple emitter site, a result of 15% is simple to understand. The total detected field strength of each emitter (to its limit, at its frequency) has added up to 15%. Besides the ease of use, the main advantage is that you no longer have the “need to know” the frequency when using a shaped probe.

Table: Standards and matching probe models

Standard or Guidance	Level	Model
U.S. FCC, 1997	Occupational/ Controlled	<b>EA 5091</b>
IEEE C95.1-2019	Controlled Environments	<b>EB 5091</b>
Canada Safety Code 6, 2015	Controlled Environments	<b>EC 5091</b>
ICNIRP 1998 Guidelines compliant with ICNIRP 2020 above 30 MHz	Occupational	<b>ED 5091</b>

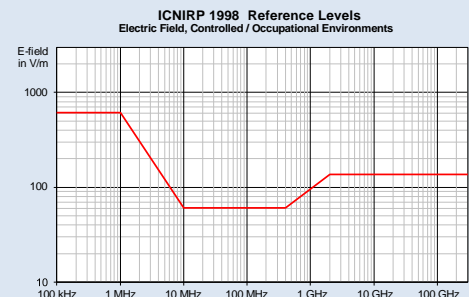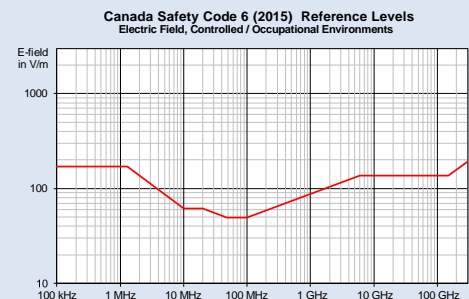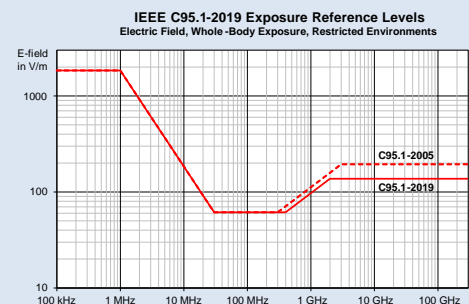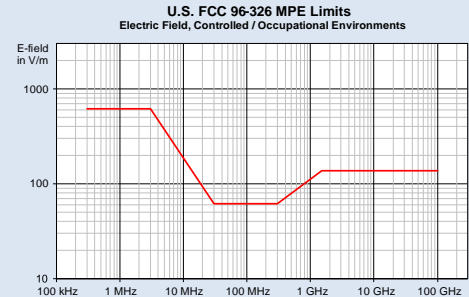

## SPECIFICATIONS <sup>a</sup>

Probe EA ... ED 5091	Electric (E-)Field
Frequency range <sup>(b)</sup>	300 kHz to 50 GHz (IEEE Model: 3 MHz to 50 GHz)
Type of frequency response	Shaped, see table on page 2
Measurement range	0.5 to 600 % of Standard (Power Density)
Dynamic range	30 dB
CW damage level	2000 % of Standard   700 mW/cm <sup>2</sup>
Peak damage level <sup>(c)</sup>	32 dB above Standard
Sensor type	Combined diodes/ thermocouples
Directivity	Isotropic (Tri-axial)
Readout mode / spatial assessment	Combined 3-axis (RSS)
<b>UNCERTAINTY</b>	
Flatness of frequency response <sup>(d)</sup> Calibration uncertainty not included	±2 dB from Standard
Calibration uncertainty <sup>(e)</sup>	±1.5 dB (≤ 750 MHz) ±1.7 dB (750 MHz to 1.8 GHz) ±1.4 dB (≥ 1.8 GHz to 45.5 GHz)
Linearity Referred to 100 %	±3 dB (< 4 % of Standard) ±1 dB (4% to 12 % of Standard) ±0.5 dB (12 % to 600 % of Standard)
Isotropic response <sup>(f)</sup>	typ. ±1 dB (≥ 10 MHz)
Temperature response	typ. ±0 dB (≥ 2 GHz)
<b>GENERAL SPECIFICATIONS</b>	
Calibration frequencies	0.3/ 3/ 10/ 30/ 100/ 300/ 750 MHz   1/ 1.8/ 2.45/ 4/ 8.2/ 10/ 18/ 26.5/ 40/ 45.5 GHz
Recommended calibration interval	24 months
Temperature range	
Operating	0 °C to +50 °C
Non-operating (transport)	-40 °C to +70 °C
Humidity	5 to 95 % RH @ ≤25 °C   ≤23 g/m <sup>3</sup> absolute humidity
Size	350 mm x 104 mm Ø
Weight	240 g
Compatibility	NBM-500 series meters
Country of origin	Germany

(a) Unless otherwise noted specifications apply at reference condition: device in far-field of source, ambient temperature 23±3 °C, relative air humidity 40% to 60%, sinusoidal signal

(b) Cutoff frequency at approx. -3 dB

(c) Pulse length 1µsec, duty cycle 1:1000

(d) Frequency response can be compensated for by the use of correction factors stored in the probe memory

(e) Accuracy of the fields generated to calibrate the probes

(f) Uncertainty due to varying polarization (verified by type approval test for meter with probe). Ellipse ratio included and calibrated for each probe

## ORDERING INFORMATION

	Part number P/N
Probe EA 5091, FCC 1997 Controlled Shaped for NBM, 300 kHz - 50 GHz, E-Field	<b>2402/07D</b>
Probe EB 5091, IEEE 2019 Restricted Shaped for NBM, 3 MHz - 50 GHz, E-Field	<b>2402/21B</b>
Probe EC 5091, SC 6 2015 Controlled Shaped for NBM, 300 kHz - 50 GHz, E-Field	<b>2402/16D</b>
Probe ED 5091, ICNIRP 1998 Occ Shaped for NBM, 300 kHz - 50 GHz, E-Field (compliant with ICNIRP 2020 above 30 MHz)	<b>2402/10D</b>
Probe ED 5091, ICNIRP 1998 Occ Shaped, ACC - with accredited (DAkKS) calibration up to 18 GHz, basic unit required	<b>2402/10D/ACC</b>

**Narda Safety Test Solutions GmbH**  
 Sandwiesenstrasse 7  
 72793 Pfullingen, Germany  
 Phone +49 7121 97 32 0  
 info.narda-de@L3Harris.com

**L3Harris Narda-STs**  
 North America Representative Office  
 435 Moreland Road  
 Hauppauge, NY11788, USA  
 Phone +1 631 231 1700  
 NardaSTS@L3Harris.com

**Narda Safety Test Solutions S.r.l.**  
 Via Rimini, 22  
 20142 Milano, Italy  
 Phone +39 0258188 1  
 nardait.support@L3Harris.com

**Narda Safety Test Solutions GmbH**  
 Beijing Representative Office  
 Xiyuan Hotel, No. 1 Sanlihe Road, Haidian  
 100044 Beijing, China  
 Phone +86 10 6830 5870  
 support@narda-sts.cn

[www.narda-sts.com](http://www.narda-sts.com)

© Names and Logo are registered trademarks of Narda Safety Test Solutions GmbH and L3Harris Technologies, Inc. - Trade names are trademarks of the owners.